



INDUSTRY
工业应用



**SPECIAL QUALITIES ARE
OUR STANDARD**

坚守优质标准，造就非凡品质

OUR COMPANY

BENEFITS IN ALL SHAPES AND SIZES

我们的公司

致力为各行各业提供优质热塑性弹性体 (TPE) 产品

Thermoplastic Elastomers (TPEs) are the materials used to make progress. Compounds from KRAIBURG TPE will open up all sorts of new opportunities in product development and processing making production efficient for you as well.

The solutions provided by KRAIBURG TPE will enable you to meet the highest requirements. Our company not only offers high-quality specially custom-engineered products, but also provides a unique level of comprehensive customer service.

The company's motto, "CUSTOM-ENGINEERED TPE AND MORE", is meant to be taken literally. Our goal is to identify the challenges you face with you and support you at all times anywhere in the world.

热塑性弹性体 (TPE) 是实现产品改进的重要材料。凯柏胶宝® 的化合物将为产品开发和加工开辟出全新的可能，让您的生产效率更加出色。

凯柏胶宝® 的TPE解决方案将竭力满足您的全部要求。我们公司不仅提供高品质的特殊定制产品，还用心提供全面而独家的客户服务。

公司一言一行，都在贯行“不只是定制 TPE”的座右铭。我们的目标是：与您携手，明确当前挑战，在世界各地随时随地为您提供支持。



Regional Headquarters
区域总部

Buford (GA) USA
布福德(乔治亚州)/美国




Headquarters
总部

Waldkraiburg GERMANY
瓦尔德克赖堡/德国



Regional Headquarters
区域总部

Kuala Lumpur MALAYSIA
吉隆坡/马来西亚

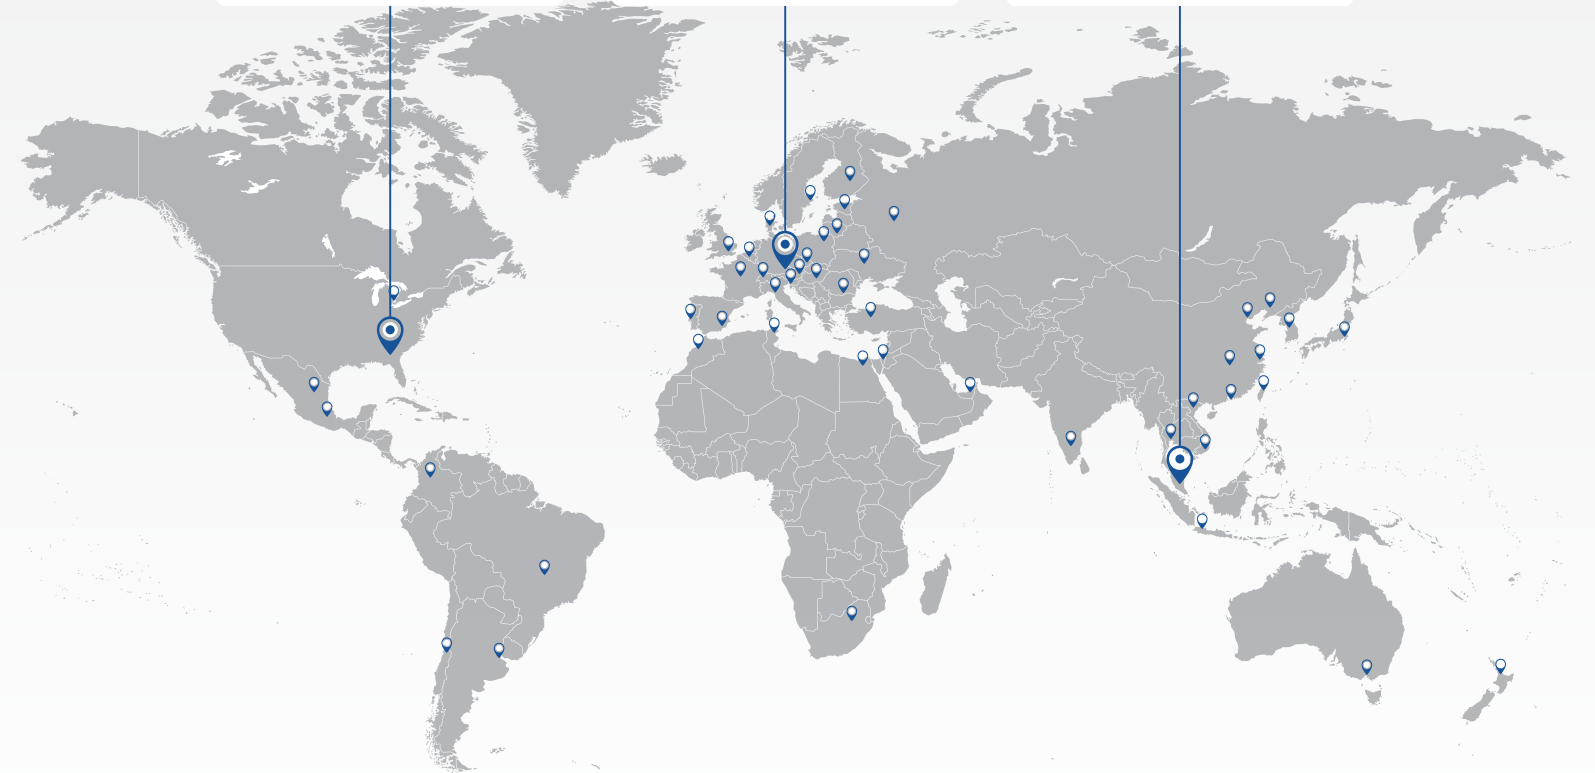



THE MARKET

GETTING TO GRIPS WITH EVERYTHING

市场

完美掌控

Thermoplastic Elastomers (TPEs) are playing an increasingly important role in industrial applications. They improve the functionality of products and give them an appealing appearance. TPEs also provide optimal touch qualities making specific designs possible and increasing the value of the products.

KRAIBURG TPE has developed compounds specifically tailored to industrial applications that are as multifaceted as the industry itself. This is highlighted in diverse segments such as the electronics, building and sanitary sectors.

When functional integration and design require compounds that are optimum for multi-component parts, you can be confident that KRAIBURG TPE materials will be the perfect choice for your product. In addition, our specially developed TPEs are fully compliant with flame retardation and drinking water regulations.

With a low density of up to 0.7 g/cm^3 , our Lightweight TPE ensures weight-reduced components and end products in various market segments.

热塑性弹性体 (TPE) 在工业应用中发挥着越来越重要的作用。它不仅可以改善产品功能，赋予其充满吸引力的外观，还能优化触感，满足各种创新设计的材料需求，从而极大地提高产品的价值。

凯柏胶宝® 为各种工业应用量身开发了各式各样的化合物，我们的产品尤其被广泛应用于电子、建筑和卫生行业等多个不同领域。

在当今工业领域，许多功能整合和设计都要求化合物能应用于多组分包胶部件，因此凯柏胶宝® 的 TPE 材料绝对是您不二之选。此外，我们特别开发的 TPE 能够完全符合阻燃和供水安全等法规。


我们的轻质 TPE 密度低至 0.7 g/cm^3 ，可真正减轻各应用组件和最终产品的重量。

APPLICATION AREAS

GETTING THE JOB DONE EVERYWHERE

应用领域

TPE 无处不在, 放心, 可靠

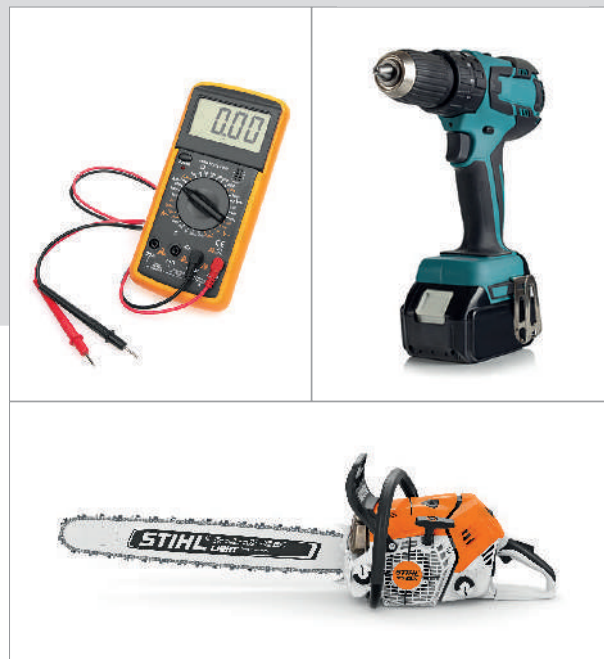

TOOLS 工具

- Garden equipment
- Hand tools
- Measuring devices
- Power tools
- 园艺设备
- 手动工具
- 测量设备
- 电动工具




DRINKING WATER & SANITARY 饮用水和卫生用品

- Gaskets
- Hoses
- Shower heads
- Sprinkler systems (garden, agriculture)
- 垫圈
- 软管
- 淋浴头
- 洒水系统 (花园、农业)



HOUSEHOLD APPLIANCES 家用电器

- Cleaning devices
- Coffee machines
- Mixers
- Vacuum cleaners
- 清洁设备
- 咖啡机
- 搅拌机
- 吸尘器

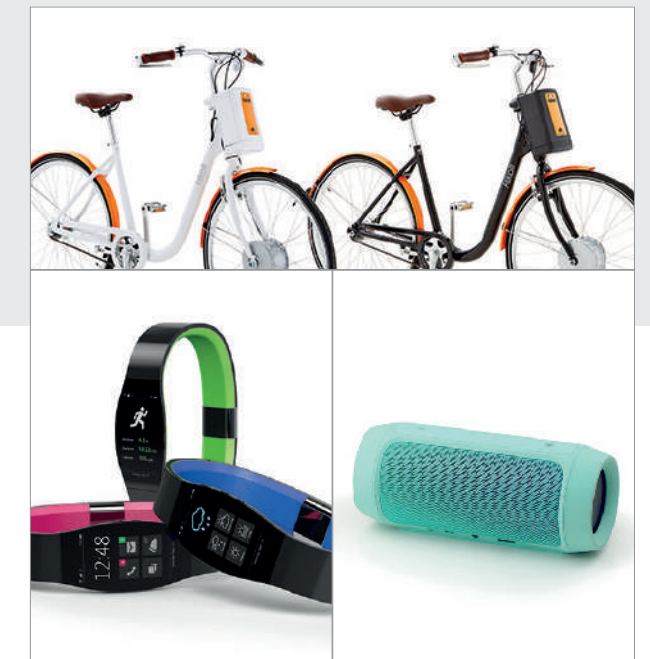

CONSUMER ELECTRONICS 电子消费品

- E-scooters & e-bikes
- Home entertainment
- Music & audio devices
- Navigation devices
- Wearables & watches
- 电动滑板车和电动自行车
- 家庭娱乐
- 音乐和音频设备
- 导航设备
- 可穿戴设备和手表

APPLICATION AREAS

GETTING THE JOB DONE EVERYWHERE

应用领域

TPE 无处不在, 放心, 可靠




ELECTRICS & ELECTRONICS 电气与电子

- Battery systems
- Grommets
- Plugs
- 电池系统
- 垫圈
- 插头



WHITE GOODS 白色家电

- Dryer
- Refrigerators
- Stoves
- 烘干机
- 冰箱
- 炉灶

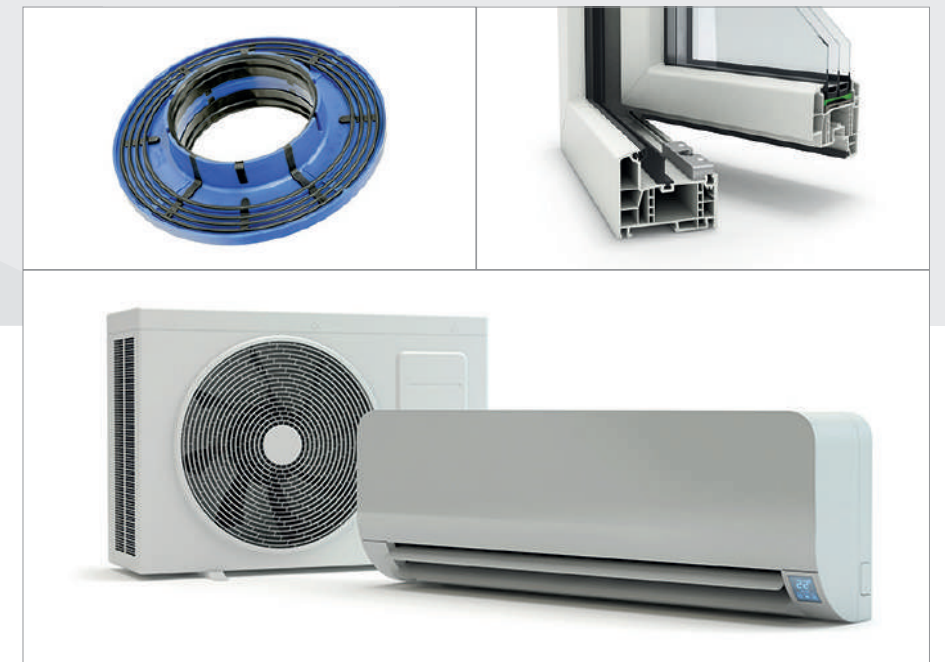

BUILDING & CONSTRUCTION 建筑施工


- Air conditioning and heating installation
- Joint tapes
- Window and door seals
- 空调和暖气安装
- 连接胶带
- 门窗密封条

MATERIAL PROPERTIES

STAND-ALONE OR IN COMBINATION

材料特性

单独加工或多组分包胶

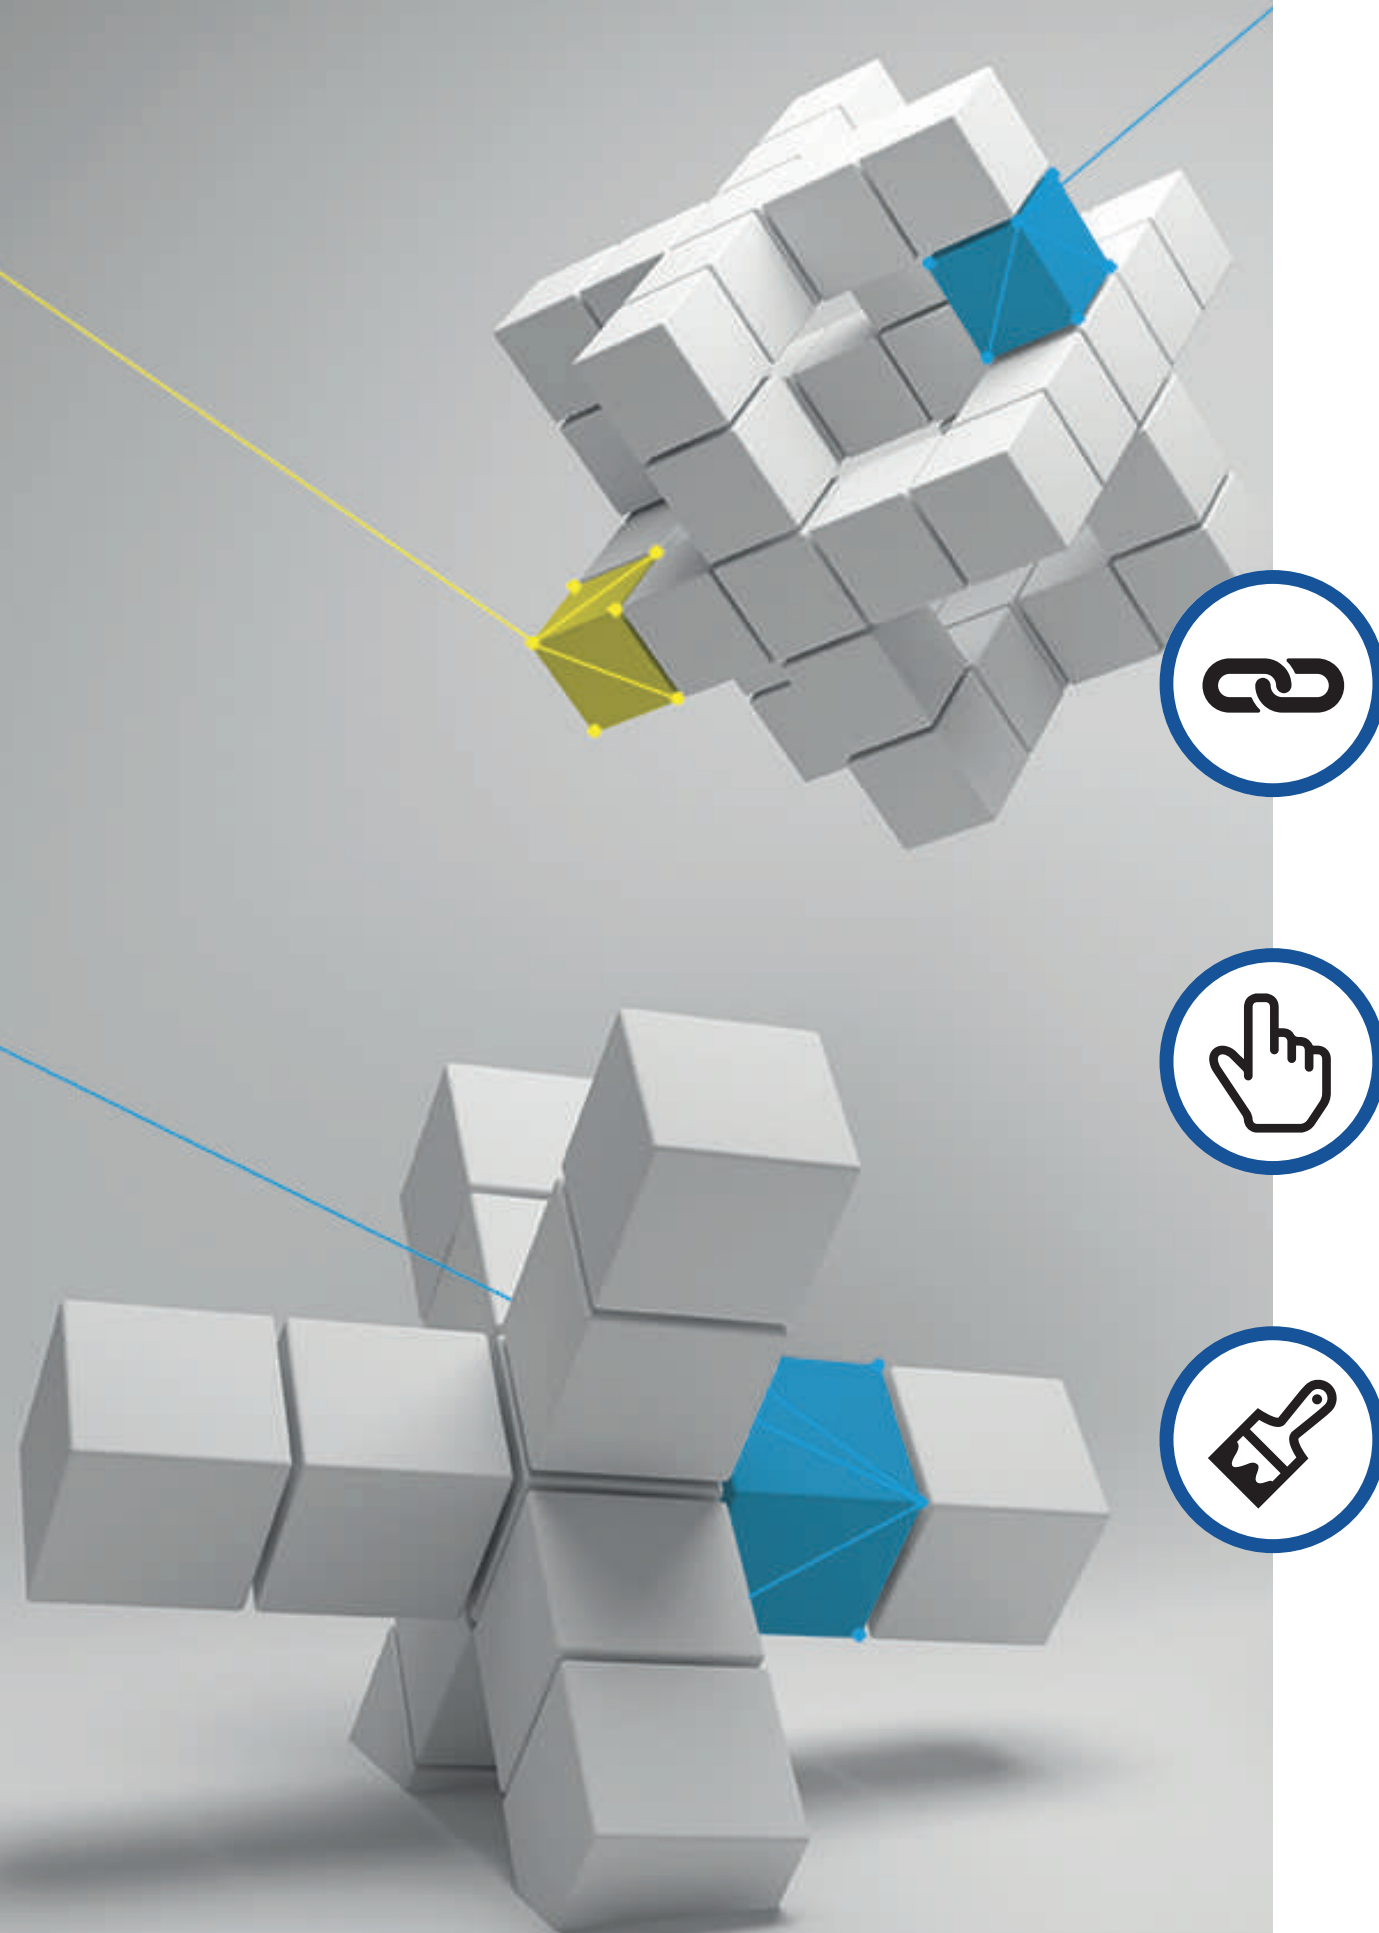

ADHESION

Made for each other

Thanks to their optimized adhesion properties, TPEs can be used successfully in multi-material components. Nowadays, they are vital in the manufacturing of household appliances and power tools.

包胶力

完美搭配

凭借其出众的包胶性能，TPE 可以成功应用于多材料组件中。如今，它们在家用电器和电动工具的制造中发挥着至关重要的作用。

TACTILE QUALITIES

Feels more than good

Durability and surface feel are crucial qualities. A high surface quality offers products with added value. KRAIBURG TPE can adjust the formulas used in materials to influence the grip and touch qualities. As an example, TPEs are already used in a wide variety of handles.

触感品质

比良好更卓越的触感

耐用性和表面触感是产品至关重要的品质。优秀的表面触感能给产品带来更多价值。凯柏胶宝® 可以调整材料配方，改变抓握性和触感。例如，TPE 已广泛用于各式各样的手柄中。

COLORING BEHAVIOR

Setting colorful highlights

Visual impression counts. An engaging appearance always means added value. KRAIBURG TPE can match your own individual color to set yourself apart. Our inhouse coloring team provides the right shade of color for TPE compounds with great precision. All of our colors are high-quality and durable, and you can rely on our global supply security.

着色性能

打造色彩焦点



视觉印象非常重要。引人入胜的外观始终都具有提升价值的效果。凯柏胶宝® 可以帮助您展示独一无二的色彩，让您的产品更加与众不同。我们的配色团队可为 TPE 化合物设计提供极高精度的准确色调。我们所有的颜色都具有高品质和耐用的特点，我们的全球供应可保证您的生产持续性。

MATERIAL PROPERTIES

STAND-ALONE OR IN COMBINATION

材料特性

单独加工或多组分包胶

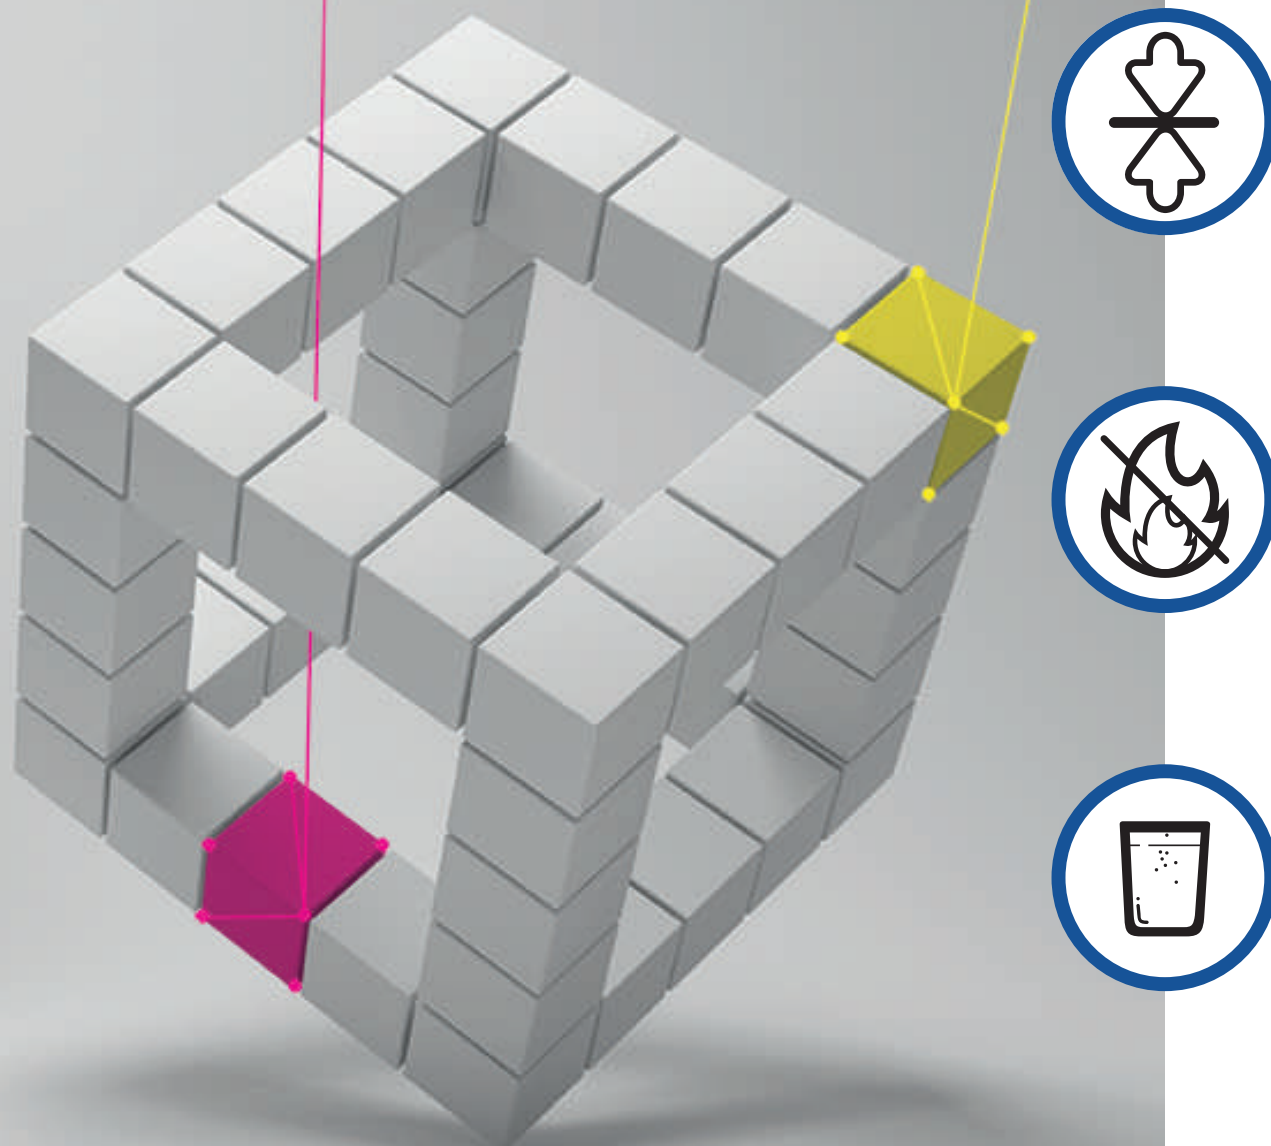

ELASTIC RECOVERY

Reliable performance

Our TPEs offer optimized compression set characteristics – whether it is in delicately shaped seals for hearing aids or in sturdy components for household appliances and power tools. Specially developed compounds help ensure that end products comply with specific standards for watertightness and dustproofness.

弹性恢复

可靠的性能表现

我们的 TPE 具有优秀的压缩永久变形特性，无论是用于助听器的精巧密封件，还是用于家用电器和电动工具的牢固部件，都能提供出色的弹性恢复力。特殊开发的化合物，可帮助确保最终产品符合防水和防尘的特定标准。

FLAME PROTECTION

Safety: a hot topic

Fire protection is a constant topic in electrical and electronic applications of all kinds. KRAIBURG TPE takes environmental and health considerations into account by offering halogen-free fire protection system solutions according to IEC 61249-2-21.

防火保护

安全：一个热点话题

防火始终是各种电气和电子应用中的重中之重。凯柏胶宝® 严格遵照 IEC 61249-2-21 提供无卤素防火系统解决方案，致力于保障环境和健康安全。

DRINKING WATER

Tested and approved

Strict regulations require safe and intelligent material solutions. These TPEs have performed well in applications involving direct contact with drinking water such as tubes and fittings. They feature a low kinking tendency and excellent adhesion to PP & PE.

饮用水

经过测试和认证

严格的法规需要安全和智能的材料解决方案。我们的 TPE 产品在管材和配件等饮用水直接接触应用中表现非凡。它们具有低扭结倾向，并且对 PP 和 PE 均有优异的包胶力。

已获得 DVGW、W270、KTW、WRAS、ACS 批准。

Approvals in accordance with DVGW, W270, KTW, WRAS, ACS.

CUSTOM-ENGINEERED PROPERTIES

WHAT ARE YOUR REQUIREMENTS?

定制设计解决方案

产品要求，您说了算

The TPE solutions are as multifaceted as the industry itself. Our compounds are established atop the industry in different sectors. For us, there is no such thing as a niche market.

Tell us about the challenges you may be facing while implementing your product idea and we will be pleased to help you improve your product's quality and functionality.

Have we left anything out that you need? Then feel free to contact us.

我们提供应用于各个行业的 TPE 解决方案。如今，我们的化合物已在这些行业中获得了良好的口碑。对于我们而言，所有市场，无论规模大小，都是我们认真探索和服务的对象。

请告诉我们您的产品创意落地时遇到的障碍，我们将努力帮助您改善产品的质量和功能。

还有其他需求？请随时与我们联系。





SERVICE

GOOD ADVICE IS INCLUDED

服务

中肯建议，与您同行

Your satisfaction is the standard we set for our work. To ensure the highest level of customer satisfaction, we have developed a quality assurance approach that covers the products, processes, and people involved. Our laboratories are designed and equipped to follow the latest state of the art technology.

In other words: you can tell us what challenges you are facing and we will dedicate ourselves to finding the best possible solution. Custom-engineered and extremely high-quality compounds provide the basis for this.

In addition, you will be able to benefit from our technical expertise, built up over many years of experience. Thanks to personal on-site consulting and unique global customer service, you will be able to enjoy the maximum support.

您的满意是我们的宗旨。为确保客户绝对的满意度，我们制定出了一项涵盖产品、加工和人员的质量保证方针。另外，我们拥有精心设计、设备齐全的实验室，以及最先进的技术。

简而言之，您只需告诉我们您所面临的挑战，凯柏胶宝® 将竭力提供定制设计和优质产品，为您给出理想的解决方案。

此外，我们在材料领域深耕多年所获得的丰富经验以及精进的技术专长，也能让你获益。依靠现场面对面咨询和独特的全球化客户服务，我们将为您提供最强力的支持。



SUSTAINABILITY

ALWAYS LOOKING TO THE FUTURE

可持续发展

立足当下，着眼未来

Sustainability is not just a buzzword at KRAIBURG TPE, it is a principle we live by. With us you are choosing a partner who takes on responsibility for the environment and society. Today and tomorrow. For example, we do not use palm oil in the materials we produce.

Our compounds are PVC-free, halogen-free and recyclable.

- Certified worldwide in accordance with ISO 14001 and ISO 9001
- Headquarters in Germany certified in accordance with ISO 50001
- EH&S management, reporting & auditing
- Systematic energy management
- Annually renewed environmental protection and occupational safety program
- Selection of raw materials suppliers based on quality and environmental impact

在凯柏胶宝®，可持续发展不仅仅是一个时下流行的概念，更是我们身体力行的原则。选择我们，您将会拥有一位对环境、对社会有责任有担当的合作伙伴，不止当下，还有未来。例如，我们生产的材料中不会使用棕榈油。

我们的化合物中不含PVC、卤素，并且可以回收利用。

- 全球所有生产基地皆符合 ISO 14001 和 ISO 9001 认证标准
- 德国总部符合 ISO 50001 认证标准
- EH&S 管理、报告和审计
- 系统的能源管理
- 每年更新环境保护和职业安全计划
- 根据质量和环境影响选择原材料供应商



TPE PORTFOLIO SERIES

INDUSTRY SECTOR

TPE 组合系列

工业部门

热塑宝 K THERMOLAST® K	包胶材料 Adhesion Materials
AD1	ABS, PC, PC/ABS
AD1/AP	ABS, PC, PC/ABS
AD1/CS	ABS, PC, PC/ABS, PBT
AD/PA	PA
AD/PA/CS	PA
AD/PA/CS2	PA
AD/POM	POM
DW/H	PP
FR2	PP
FR/AP	PP
GP/AP	PP
GP/FG	PP
LW/CS/UV	PP
LW/PA	PA
LW/UV	PP
SCR/AP	PP
UV/AD2	ABS, ASA, PC, PC/ABS, PMMA
UV/AP	PP
UV/LD/b	PP
VS/AD/HM	ABS, ASA, PA, PC, PC/ABS, SAN

热塑宝 R THERMOLAST® R	包胶材料 Adhesion Materials
RC/PCR/AP	PP

热塑宝 V THERMOLAST® V	包胶材料 Adhesion Materials
LTP	PP
LTP/PA	PA

尼塑宝® For Tec E®	包胶材料 Adhesion Materials
AD/PAX/CR	PA

THERMOLAST® K | 热塑宝 K

Series 系列	The AD1 series is your material solution for applications with adhesion to polar thermoplastics such as ABS, PC and PC/ABS. The compounds are available in black and natural colors. Natural color variants can be colored in many different ways.
AD1	AD1 系列材料解决方案适用于包胶极性热塑性材料（如 ABS、PC 和 PC/ABS）应用。这类化合物可选黑色和本色。本色产品系列可用多种不同方式着色。

Processing Method: Extrusion, Injection Molding | 加工方法: 挤塑, 注塑成型

Compound Name 化合物名称	Hardness 硬度	Color 颜色	Adhesion 包胶
TCxMLB	50 – 80 Shore A	Natural 本色	ABS, PC, PC/ABS
TCxMLZ	50 – 80 Shore A	Black 黑色	
TCxMSB	30 – 40 Shore A	Natural 本色	
TCxMSZ	30 – 40 Shore A	Black 黑色	

Typical Applications	典型应用
<ul style="list-style-type: none"> Door sills Function and design elements Grommets Handles (hand tools and power tools etc.) Seals Soft touch surface (thumb wheels, push buttons, switches) Thumb wheels 	<ul style="list-style-type: none"> 门槛 功能和设计要素 垫圈 手柄（手动工具和电动工具等） 密封件 软质表面（拨轮、按键、开关） 拨轮

Material Advantages	材料属性
<ul style="list-style-type: none"> Adhesion to PC, ABS, PC/ABS, ASA, SAN Colorable Controlled level of emission and odor Insert molding possible Soft touch surface Soft, non-sticky haptic 	<ul style="list-style-type: none"> 包胶 PC、ABS、PC/ABS、ASA、SAN 可染色 可控的排放和气味水平 可嵌入成型 柔软的表面触感 柔软不粘的触感

Regulations / Approvals	法规 / 批准
<ul style="list-style-type: none"> DIN 75201-B - Fogging DIN EN ISO 105-B06 Method 3 UL 94 HB VDA 270 B3 - Odor 	<ul style="list-style-type: none"> DIN 75201-B - 雾化值 DIN EN ISO 105-B06 Method 3 UL 94 HB VDA 270 B3 - 气味

THERMOLAST® K | 热塑宝 K

Series 系列	The AD1/AP series is your material solution for industry applications with adhesion to polar thermoplastics such as ABS, PC and PC/ABS for Asia Pacific Market. The compounds are available in black colors.
AD1/AP	AD1/AP 系列适用于亚太市场工业应用的材料解决方案, 包胶极性热塑性塑料（如ABS, PC）。这些化合物有黑色可供选择。

Processing Method: Injection Molding | 加工方法: 注塑成型

Compound Name 化合物名称	Hardness 硬度	Color 颜色	Adhesion 包胶
TCxPGG-BLCK	60 – 80 Shore A	Black 黑色	ABS, PC, PC/ABS

Typical Applications	典型应用
<ul style="list-style-type: none"> Door sills Function and design elements Grommets Handles (hand tools and power tools, etc.) Seals Soft touch surface (thumb wheels, push buttons, switches) Thumb wheels 	<ul style="list-style-type: none"> 门槛 功能和设计要素 垫圈 手柄(手动工具和电动工具等) 密封件 软质表面(拨轮、按键、开关) 拨轮

Material Advantages	材料属性
<ul style="list-style-type: none"> Adhesion to PC, ABS, PC/ABS Controlled level of emission and odor In-process recycling possible Insert molding possible Soft touch surface Temperature stability up to 90 °C UV resistance 	<ul style="list-style-type: none"> 包胶 PC、ABS、PC/ABS 可控的排放和气味水平 可在制造过程中回收利用 可嵌入成型 柔软的表面触感 90 °C下的温度稳定性 抗紫外线

THERMOLAST® K | 热塑宝 K

Series 系列	The AD1/CS series is your material solution for applications with optimized compression set and adhesion to polar thermoplastics such as ABS, PC, PC/ABS and PBT. The compounds are available in black and natural colors. Natural color variants can be colored in many different ways.
AD1/CS	AD1/CS 系列材料解决方案适用于要求出色的压缩永久变形性能和包胶极性热塑性材料（如 ABS、PC、PC/ABS 和 PBT）的应用。这类化合物可选黑色和本色。本色产品系列可用多种不同方式着色。

Processing Method : Extrusion, Injection Molding | **加工方法** : 挤塑, 注塑成型

Compound Name	化合物名称	Hardness 硬度	Color 颜色	Adhesion 包胶
TPxVCN TPxVCZ		50 – 75 Shore A 50 – 80 Shore A	Natural 本色 Black 黑色	ABS, PC, PC/ABS, PBT
Typical Applications	典型应用			
<ul style="list-style-type: none">Cable clipsFunction and design elementsGrommetsSealsSoft touch surface (thumb wheels, push buttons, switches)	<ul style="list-style-type: none">缆线卡钩功能和设计要素垫圈密封件软质表面 (拨轮、按键、开关)			
Material Advantages	材料属性			
<ul style="list-style-type: none">Adhesion to PBTAdhesion to PC, ABS, PC/ABS, ASA, SANOptimized compression setOptimized mechanical properties	<ul style="list-style-type: none">包胶 PBT包胶 PC、ABS、PC/ABS、ASA、SAN出色的压缩永久变形性能优异的机械特性			
Regulations / Approvals	法规 / 批准			
<ul style="list-style-type: none">UL 94 HB	<ul style="list-style-type: none">UL 94 HB			

THERMOLAST® K | 热塑宝 K

Series 系列	The AD/PA series is your material solution for applications with adhesion to PA. The compounds are available in black and natural colors. Natural color variants can be colored in many different ways.
AD/PA	AD/PA 系列材料解决方案适用于包胶 PA 应用。这类化合物可选黑色和本色。本色产品系列可用多种不同方式着色。

Processing Method : Injection Molding | **加工方法** : 注塑成型

Compound Name	化合物名称	Hardness 硬度	Color 颜色	Adhesion 包胶
TCxPAN TCxPAZ		20 – 80 Shore A 20 – 80 Shore A	Natural 本色 Black 黑色	PA
Typical Applications	典型应用			
<ul style="list-style-type: none">Cable clipsFunction and design elementsGrommetsHandles (hand tools and power tools, etc)Thumb wheels	<ul style="list-style-type: none">缆线卡钩功能和设计要素垫圈手柄 (手动工具和电动工具等)拨轮			
Material Advantages	材料属性			
<ul style="list-style-type: none">Adhesion to PA6 and PA6.6, up to 50% glass fiberAdhesion to PA12ColorableDry hapticHalogen-free (according to IEC 61249-2-21)Temperature stability up to 90 °C	<ul style="list-style-type: none">包胶 PA6 和 PA6.6，玻璃纤维高达 50%包胶 PA12可染色干爽触感不含卤素 (符合 IEC 61249-2-21 标准)90 °C 下的温度稳定性			
Regulations / Approvals	法规 / 批准			
<ul style="list-style-type: none">DIN 75201-B – FoggingDIN EN ISO 105-B06 Method 3UL 94 HB	<ul style="list-style-type: none">DIN 75201-B - 雾化值DIN EN ISO 105-B06 Method 3UL 94 HB			

THERMOLAST® K | 热塑宝 K

Series 系列	The AD/PA/CS series is your material solution for applications with adhesion to PA and sealing function. The compounds are available in black and natural colors. Natural color variants can be colored in many different ways.
AD/PA/CS	AD/PA/CS 系列材料解决方案适用于包胶 PA 和密封功能应用。这类化合物可选黑色和本色。本色产品系列可用多种不同方式着色。

Processing Method : Injection Molding | **加工方法** : 注塑成型

Compound Name	化合物名称	Hardness 硬度	Color 颜色	Adhesion 包胶
TCxPCN TCxPCZ		40 – 80 Shore A 35 – 75 Shore A	Natural 本色 Black 黑色	PA
Typical Applications	典型应用			
<ul style="list-style-type: none">Cable clipsFasteningsGrommetsMembranesSeals	<ul style="list-style-type: none">缆线卡钩紧固件垫圈薄膜密封件			
Material Advantages	材料属性			
<ul style="list-style-type: none">Adhesion to PA6 and PA6.6, up to 50% glass fiberOptimized compression setOptimized flow propertiesTemperature stability up to 90 °C	<ul style="list-style-type: none">包胶 PA6 和 PA6.6，玻璃纤维高达 50%出色的压缩永久变形性能优异的流动性90 °C 下的温度稳定性			
Regulations / Approvals	法规 / 批准			
<ul style="list-style-type: none">UL 94 HB	<ul style="list-style-type: none">UL 94 HB			

THERMOLAST® K | 热塑宝 K

Series 系列	The AD/PA/CS2 Series is your material solution for applications with excellent adhesion to PA as well as outstanding compression set. The compounds are available in natural and black colors. Natural color variants can be colored in many different ways.
AD/PA/CS2	AD/PA/CS2 系列材料解决方案适用于对 PA 有卓越包胶性和出色压缩变形性能的应用领域。这类化合物有黑色和本色可选。本色产品系列可用多种不同方式着色。

Processing Method : Injection Molding | **加工方法** : 注塑成型

Compound Name	化合物名称	Hardness 硬度	Color 颜色	Adhesion 包胶
TCxPRN TCxPRZ		40 – 80 Shore A 40 – 80 Shore A	Natural 本色 Black 黑色	PA
Typical Applications	典型应用			
<ul style="list-style-type: none">Cable clipsFasteningsGrommetsMembranesSeals	<ul style="list-style-type: none">缆线卡钩紧固件垫圈薄膜密封件			
Material Advantages	材料属性			
<ul style="list-style-type: none">Adhesion to PA6 and PA6.6, up to 50% glass fiberOptimized compression setOptimized mechanical propertiesTemperature stability up to 100 °C	<ul style="list-style-type: none">包胶 PA6 和 PA6.6，玻璃纤维高达 50%出色的压缩永久变形性能优异的机械特性100 °C 下的温度稳定性			
Regulations / Approvals	法规 / 批准			
<ul style="list-style-type: none">PV 3930 Florida (2 years) – Weathering TestUL 94 HB	<ul style="list-style-type: none">PV 3930 佛罗里达试验 (2 年) - 耐候性测试UL 94 HB			

THERMOLAST® K | 热塑宝 K

Series 系列	The AD/POM series is your material solution for applications with adhesion to POM. The compounds are available in black and natural colors. Natural color variants can be colored in many different ways.
AD/POM	AD/POM 系列材料解决方案适用于包胶 POM 应用。这类化合物可选黑色和本色。本色产品系列可用多种不同方式着色。

Processing Method : Extrusion, Injection Molding | **加工方法** : 挤塑, 注塑成型

Compound Name	化合物名称	Hardness 硬度	Color 颜色	Adhesion 包胶
TCxHAA TCxHAZ TCxHBA TCxHBZ		50 – 80 Shore A 50 – 80 Shore A 60 – 70 Shore A 60 – 70 Shore A	Natural 本色 Black 黑色 Natural 本色 Black 黑色	POM
Typical Applications		典型应用		
	<ul style="list-style-type: none">Components for conveying systemsFunction and design elementsHandles (hand tools and power tools, etc)Thumb wheels		<ul style="list-style-type: none">输送系统零件功能和设计要素手柄(手动工具和电动工具等)拨轮	
Material Advantages		材料属性		
	<ul style="list-style-type: none">Adhesion to POMColorableSoft touch surface		<ul style="list-style-type: none">包胶 POM可染色柔软的表面触感	
Regulations / Approvals		法规 / 批准		
	<ul style="list-style-type: none">DIN 75201-B – FoggingDIN EN ISO 105-B06 Method 3VDA 270 B3 – Odor		<ul style="list-style-type: none">DIN 75201-B - 雾化值DIN EN ISO 105-B06 Method 3VDA 270 B3 - 气味	

THERMOLAST® K | 热塑宝 K

Series 系列	The DW/H series is your material solution for hoses in contact with drinking water. The compounds are approved according to important European drinking water standards. They are translucent and can be colored in many different ways.
DW/H	DW/H 系列材料解决方案适用于接触饮用水的软管、喷头和其他应用领域。这类化合物符合欧洲主要的几大饮用水标准。产品为半透明, 可用多种不同方式着色。

Processing Method : Extrusion, Injection Molding | **加工方法** : 挤塑, 注塑成型

Compound Name	化合物名称	Hardness 硬度	Color 颜色	Adhesion 包胶
TFxWHA TFxWHB		55 – 85 Shore A 60 – 80 Shore A	Translucent 半透明 Translucent 半透明	pp
Typical Applications		典型应用		
	<ul style="list-style-type: none">Hoses for household applicationsGrip applicationsJet formerSeals, functional and design elements in sanitary sectorShower hosesSoft touch		<ul style="list-style-type: none">家用电器软管把手应用喷射成型机密封件, 卫生行业的功能和设计要素淋浴软管软触感	
Material Advantages		材料属性		
	<ul style="list-style-type: none">Adhesion to PPAlternative material to PVC-PLow kinking tendencyOptimized mechanical propertiesPlasticizer freePrecoloration in all colorsResistance to microbesSurface with low sensitivity to dirt		<ul style="list-style-type: none">包胶 PPPVC-P 的替代材料低扭结倾向优异的机械特性不含增塑剂可进行所有颜色的预着色抗微生物表面耐污垢	
Regulations / Approvals		法规 / 批准		
	<ul style="list-style-type: none">ACS (DGS/VS4 n° 200/232)DVGW Arbeitsblatt W270KTWRegulation (EU) No 10/2011WRAS: BS6920-1:2000 and/or 2014 cold water (23 °C)WRAS: BS6920-1:2000 and/or 2014 cold water (60 °C)		<ul style="list-style-type: none">ACS (DGS/VS4 n° 200/232)德国 DVGW Arbeitsblatt W270德国 KTW 认证欧盟法规 (EU) No 10/2011WRAS: BS6920-1:2000 和/或 2014 冷水 (23 °C)WRAS: BS6920-1:2000 和/或 2014 冷水 (60 °C)	

THERMOLAST® K | 热塑宝 K

Series 系列	The FR2 series is your material solution for applications with high flame retardant requirements. The compounds are halogen-free according to IEC 61249-2-21. The UL94 V-0 (1.5 mm) certificate and the classification according to DIN EN 45545-2 R22/23 HL3 is valid for available hardness range and for natural and coloured compounds.
FR2	FR2 系列材料解决方案适用于有高阻燃需求的应用。根据 IEC 61249-2-21 标准, 这类化合物经认证, 不含卤素。在现有的硬度范围有本色和黑色化合物而且拥有UL94 V-0 (1.5mm) 证书和 DIN EN 45545-2 R22/23 HL3 的分类标准。

Processing Method : Extrusion, Injection Molding | **加工方法** : 挤塑, 注塑成型

Compound Name	化合物名称	Hardness 硬度	Color 颜色	Adhesion 包胶
TCxFTN TCxFTZ		50 – 80 Shore A 50 – 80 Shore A	Natural 本色 Black 黑色	PP
Typical Applications		典型应用		
	<ul style="list-style-type: none">Applications in railway sectorCable management systems e.g. cable holders, cable glands and grommetsElectrical insulation for busbarsGaskets for electric and electronic applications e.g. cable boxes		<ul style="list-style-type: none">铁路行业应用电缆管理系统, 例如电缆支架、电缆密封套和索环	
Material Advantages		材料属性		
	<ul style="list-style-type: none">Adhesion to PPFulfills railway requirements such as high LOI, low toxicity and smoke densityHalogen-free (according to IEC 61249-2-21)High glow-wire flammability index (GWFI)In-process recycling possibleNo interaction with copperNo silicones addedPrecoloration in all colorsSelf-extinguishing, no release of burning dropletsStability in conditions up to 60 °C and 75% humidityTemperature stability up to 85 °C		<ul style="list-style-type: none">包胶 PP符合铁路行业要求, 例如高 LOI、低毒性和烟雾密度	
Regulations / Approvals		法规 / 批准		
	<ul style="list-style-type: none">DIN EN 45545-2 / R22/23 HL3IEC 60695-2-12:2021-10 (GWFI) 960 °C / 2 mmUL 94 V-0 (1.5 mm)		<ul style="list-style-type: none">不含卤素(符合 IEC 61249-2-21 标准)高灼热丝可燃性指数 (GWFI)可在制造过程中回收利用与铜无反应未添加有机硅可进行所有颜色的预着色自熄性, 不会产生燃烧液滴温度 60 °C 和湿度 75% 条件下的材料稳定性85 °C下的温度稳定性	

Regulations / Approvals		法规 / 批准	
	<ul style="list-style-type: none">DIN EN 45545-2 / R22/23 HL3IEC 60695-2-12:2021-10 (GWFI) 960 °C / 2 mmUL 94 V-0 (1.5 mm)		<ul style="list-style-type: none">DIN EN 45545-2 / R22/23 HL3IEC 60695-2-12:2021-10 (GWFI) 960 °C / 2 mmUL 94 V-0 (1.5 mm)

THERMOLAST® K | 热塑宝 K

Series 系列	The FR/AP series is your material solution for applications with flame retardant requirements for the Asia Pacific market. The compounds are halogen-free according to IEC 61249-2-21. The UL94 V-0 (3.0 mm) certificate is valid for available hardness range and for natural and coloured compounds.
FR/AP	FR/AP 系列材料解决方案适用于亚太市场有阻燃需求的低壁厚应用。这类化合物不含卤素(根据 IEC 61249-2-21 标准。在现有的硬度范围有本色和黑色化合物而且拥有UL94 V-0 (3.0 mm) 证书标准。

Processing Method : Extrusion, Injection Molding | **加工方法** : 挤塑, 注塑成型

Compound Name	化合物名称	Hardness 硬度	Color 颜色	Adhesion 包胶
TCxFLN TCxFLZ		40 – 90 Shore A 40 – 90 Shore A	Natural 本色 Black 黑色	PP
Typical Applications		典型应用		
	<ul style="list-style-type: none">Cable management systems e.g. cable holders, cable glands and grommetsGaskets for electric and electronic applications e.g. cable boxes		<ul style="list-style-type: none">电缆管理系统, 例如电缆支架、电缆密封套和索环	
Material Advantages		材料属性		
	<ul style="list-style-type: none">Adhesion to PPHalogen-free (according to IEC 61249-2-21)High glow-wire flammability index (GWFI)In-process recycling possiblePrecoloration in all colorsSelf-extinguishing, no release of burning dropletsTemperature stability up to 85 °C		<ul style="list-style-type: none">包胶 PP不含卤素(符合 IEC 61249-2-21 标准)高灼热丝可燃性指数 (GWFI)可在制造过程中回收利用可进行所有颜色的预着色自熄性, 不会产生燃烧液滴85 °C下的温度稳定性	
Regulations / Approvals		法规 / 批准		
	<ul style="list-style-type: none">UL 94 V-0 (1.5 mm)		<ul style="list-style-type: none">UL 94 V-0 (1.5 mm)	

THERMOLAST® K | 热塑宝 K

Series 系列	The GP/AP series is your material solution for technical applications with adhesion to PP. The compounds are available in black and natural colors. Natural colored variants can be colored in many different ways.
GP/AP	GP/AP 系列材料解决方案适用于包胶 PP 的技术应用。这类化合物可选黑色和本色。本色产品系列可用多种不同方式着色。

Processing Method : Extrusion, Injection Molding | **加工方法** : 挤塑, 注塑成型

Compound Name	化合物名称	Hardness	硬度	Color	颜色	Adhesion	包胶
TCxTPN TCxTPZ		20 – 90 Shore A / 33 Shore D 20 – 90 Shore A / 33 Shore D		Natural Black	本色 黑色	PP	
Typical Applications				典型应用			

- Function and design elements
- Handles (hand tools and power tools etc.)
- Soft touch for grips, switches and mats

- 功能和设计要素
- 手柄（手动工具和电动工具等）
- 把手、开关和橡胶垫的柔软触感

Material Advantages	材料属性
<ul style="list-style-type: none">Adhesion to PPColorableDry hapticsIn-process recycling possibleOptimized flow propertiesOptimized mechanical properties	<ul style="list-style-type: none">包胶 PP可染色干爽触感可在制造过程中回收利用优异的流动性优异的机械特性

THERMOLAST® K | 热塑宝 K

Series 系列	The GP/FG series is your material solution for a variety of applications. The compounds are available in black and natural colors. Natural colored variants can be colored in many different ways.
GP/FG	GP/FG 系列材料解决方案适合多种不同应用。这类化合物可选黑色和本色。本色产品系列可用多种不同方式着色。

Processing Method : Extrusion, Injection Molding | **加工方法** : 挤塑, 注塑成型

Compound Name	化合物名称	Hardness	硬度	Color	颜色	Adhesion	包胶
TCxGPN TCxGPZ		20 – 90 Shore A / 32 Shore D 20 – 90 Shore A / 33 Shore D		Natural Black	本色 黑色	PP	
Typical Applications				典型应用			

- Function and design elements
- Handles (hand tools and power tools etc.)
- Seals for housings
- Soft touch surface (thumb wheels, push buttons, switches)

- 功能和设计要素
- 手柄（手动工具和电动工具等）
- 机壳密封件
- 软质表面（拨轮、按键、开关）

Material Advantages	材料属性
<ul style="list-style-type: none">Adhesion to PPColorableControlled level of emission and odorDry hapticsHalogen-free (according to IEC 61249-2-21)In-process recycling possibleOptimized mechanical propertiesSoft touch surface	<ul style="list-style-type: none">包胶 PP可染色可控的排放和气味水平干爽触感不含卤素(符合 IEC 61249-2-21 标准)可在制造过程中回收利用优异的机械特性柔软的表面触感

Regulations / Approvals	法规 / 批准
<ul style="list-style-type: none">DIN 75201-B - FoggingDIN EN ISO 105-B06 Method 3PV 3929 Kalahari (1 year) – Weathering TestPV 3930 Florida (1 year) – Weathering TestUL 94 HBVDA 270 B3 - Odor	<ul style="list-style-type: none">DIN 75201-B - 雾化值DIN EN ISO 105-B06 Method 3PV 3929 卡拉哈里试验 (1 年) - 耐候性测试PV 3930 佛罗里达试验 (1 年) - 耐候性测试UL 94 HBVDA 270 B3 - 气味

THERMOLAST® K | 热塑宝 K

Series 系列	The LW/CS/UV Series is your lightweight material solution for applications with superior requirements on sealing performance. They are available in black colors.
LW/CS/UV	LW/CS/UV 系列具有轻质和高密封性的特点，是满足严格行业要求的理想材料选择。该系列的颜色为黑色。

Processing Method : Extrusion, Injection Molding | **加工方法** : 挤塑, 注塑成型

Compound Name	化合物名称	Hardness	硬度	Color	颜色	Adhesion	包胶
TLxOCW-BLCK		35 – 75 Shore A		Black	黑色	PP	
Typical Applications				典型应用			

- Door sills
- Grommets
- Heavy-walled parts
- Seals
- Seals for windows and doors

- 门槛
- 垫圈
- 厚壁配件
- 密封件
- 门窗密封件

Material Advantages	材料属性
<ul style="list-style-type: none">Adhesion to PPIn-process recycling possibleLow densityNon-sticky surfaceOptimized compression setResilienceUV and weathering resistance	<ul style="list-style-type: none">包胶 PP可在制造过程中回收利用低密度不粘表面出色的压缩永久变形性能回弹性抗紫外线和耐候性

Regulations / Approvals	法规 / 批准
<ul style="list-style-type: none">PV 3929 Kalahari (1 year) - Weathering TestPV 3929 Kalahari (2 years) - Weathering TestPV 3930 Florida (1 year) - Weathering TestPV 3930 Florida (2 years) - Weathering Test	<ul style="list-style-type: none">PV 3929 卡拉哈里试验 (1 年) - 耐候性测试PV 3929 卡拉哈里试验 (2 年) - 耐候性测试PV 3930 佛罗里达试验 (1 年) - 耐候性测试PV 3930 佛罗里达试验 (2 年) - 耐候性测试

THERMOLAST® K | 热塑宝 K

Series 系列	The LW/PA Series is your lightweight material solution for applications with adhesion to PA. The compounds are available in black colors.
LW/PA	LW/PA 系列具有轻质和 PA 包胶的特点，是满足相关领域应用的理想材料选择。可选黑色。

Processing Method : Injection Molding | **加工方法** : 注塑成型

Compound Name	化合物名称	Hardness	硬度	Color	颜色	Adhesion	包胶
TLxNGG-BLCK		50 – 70 Shore A		Black	黑色	PA	
Typical Applications				典型应用			

- Function and design elements
- Grip applications
- Heavy-walled parts
- Soft touch

- 功能和设计要素
- 把手应用
- 厚壁配件
- 软触感

Material Advantages	材料属性
<ul style="list-style-type: none">Adhesion to PA6 and PA12Dry hapticLow densitySoft, non-sticky haptic	<ul style="list-style-type: none">包胶 PA6 和 PA12干爽触感低密度柔软不粘的触感

THERMOLAST® K | 热塑宝 K

Series 系列	The LW/UV Series is your lightweight material solution for applications with high UV- and weathering resistance. The compounds are available in black colors.
LW/UV	LW/UV 系列具有轻质、抗紫外线和耐候性的特点，是满足严格行业要求的理想材料选择。该系列的颜色为黑色。

Processing Method : Extrusion, Injection Molding | **加工方法** : 挤塑, 注塑成型

Compound Name	化合物名称	Hardness 硬度	Color 颜色	Adhesion 包胶
TLxOWG-BLCK		60 – 80 Shore A	Black 黑色	PP

Typical Applications	典型应用
<ul style="list-style-type: none">Door sillsEdge guardsFunction and design elementsHeavy-walled partsSoft touchWater deflectorsWindow encapsulations	<ul style="list-style-type: none">门槛防撞角功能和设计要素厚壁配件软触感导水器窗密封件
Material Advantages	材料属性
<ul style="list-style-type: none">Adhesion to PPIn-process recycling possibleLow densityNon-sticky surfaceUV and weathering resistance	<ul style="list-style-type: none">包胶 PP可在制造过程中回收利用低密度不粘表面抗紫外线和耐候性
Regulations / Approvals	法规 / 批准

- PV 3929 Kalahari (1 year) - Weathering Test
- PV 3929 Kalahari (2 years) - Weathering Test
- PV 3930 Florida (1 year) - Weathering Test
- PV 3930 Florida (2 years) - Weathering Test

- PV 3929 卡拉哈里试验 (1 年) - 耐候性测试
- PV 3929 卡拉哈里试验 (2 年) - 耐候性测试
- PV 3930 佛罗里达试验 (1 年) - 耐候性测试
- PV 3930 佛罗里达试验 (2 年) - 耐候性测试

THERMOLAST® K | 热塑宝 K

Series 系列	The SCR/AP series is your material solution for applications with scratch resistance requirements for the Asia Pacific market. The series is characterized by a pleasant feel to the touch. The compounds are available in natural colors and can be colored in many different ways.
SCR/AP	SCR/AP 系列材料解决方案适用于耐刮擦应用，适用于亚太市场。该系列材料具有触感舒适的特点。这类化合物为本色，可用多种不同方式着色。

Processing Method : Injection Molding | **加工方法** : 注塑成型

Compound Name	化合物名称	Hardness 硬度	Color 颜色	Adhesion 包胶
TCxSCE		30 – 80 Shore A	Natural 本色	PP

Typical Applications	典型应用
<ul style="list-style-type: none">Function and design elementsHandles (tools, toolboxes, ski poles)Soft touch surface (thumb wheels, push buttons, switches)	<ul style="list-style-type: none">功能和设计要素手柄（工具、工具箱、滑雪杖）软质表面（拨轮、按键、开关）
Material Advantages	材料属性
<ul style="list-style-type: none">Abrasion resistanceAdhesion to PPColorableControlled level of emission and odorOptimized mechanical propertiesSoft, velvety feel	<ul style="list-style-type: none">耐磨性包胶 PP可染色可控的排放和气味水平优异的机械特性天鹅绒般柔软触感

THERMOLAST® K | 热塑宝 K

Series 系列	The UV/AD2 series is your material solution for applications requiring UV resistance and adhesion to polar thermoplastics such as PC, ABS, PC/ABS, ASA and PMMA. The compounds are available in black.
UV/AD2	UV/AD2 系列材料解决方案适用于抗紫外线和包胶极性热塑性材料（如 PC、ABS、PC/ABS、ASA 和 PMMA）应用。这类化合物为黑色。

Processing Method : Injection Molding | **加工方法** : 注塑成型

Compound Name	化合物名称	Hardness 硬度	Color 颜色	Adhesion 包胶
TCxMUZ		55 – 85 Shore A	Black 黑色	PC, ABS, PC/ABS, ASA, PMMA

Typical Applications	典型应用
<ul style="list-style-type: none">Door sillsWater deflectorsWindow encapsulations	<ul style="list-style-type: none">门槛导水器窗密封件
Material Advantages	材料属性
<ul style="list-style-type: none">Adhesion to PC, ABS, PC/ABS, ASA, SANOptimized flow propertiesOptimized mechanical propertiesSurface mappingTemperature stability up to 90 °CWeather resistant	<ul style="list-style-type: none">包胶 PC、ABS、PC/ABS、ASA、SAN优异的流动性优异的机械特性表面映射90°C 下的温度稳定性耐候性
Regulations / Approvals	法规 / 批准
<ul style="list-style-type: none">PV 3929 Kalahari (2 years) – Weathering TestPV 3930 Florida (2 years) – Weathering Test	<ul style="list-style-type: none">PV 3929 卡拉哈里试验（2 年）- 耐候性测试PV 3930 佛罗里达试验（2 年）- 耐候性测试

THERMOLAST® K | 热塑宝 K

Series 系列	The UV/AP series is your material solution for applications with UV resistance requirements for Asia Pacific market. The compounds are available in black.
UV/AP	UV/AP 系列材料解决方案适用于抗紫外线应用，适用于亚太市场。该系列产品的颜色为黑色。

Processing Method : Injection Molding | **加工方法** : 注塑成型

Compound Name	化合物名称	Hardness 硬度	Color 颜色	Adhesion 包胶
TCxUVZ		50 – 70 Shore A	Black 黑色	PP

Typical Applications	典型应用
<ul style="list-style-type: none">Water deflectorsWindow encapsulations	<ul style="list-style-type: none">导水器窗密封件
Material Advantages	材料属性
<ul style="list-style-type: none">Adhesion to PPIn-process recycling possibleUV and weathering resistanceWeather resistant	<ul style="list-style-type: none">包胶 PP可在制造过程中回收利用抗紫外线和耐候性耐候性

Thermolast® K | 热塑宝 K

Series 系列	The UV/LD/b series is your material solution for applications requiring optimized mechanics and UV resistance. The compounds are available in black.
UV/LD/b	UV/LD/b 系列材料解决方案适用于要求卓越机械性能和抗紫外线的应用。该系列的颜色为黑色。

Processing Method : Extrusion, Injection Molding | 加工方法 : 挤塑, 注塑成型

Compound Name	化合物名称	Hardness 硬度	Color 颜色	Adhesion 包胶
TPxLDZ		30 – 80 Shore A / 35 Shore D	Black 黑色	PP
Typical Applications	典型应用			
<ul style="list-style-type: none">Cowls gasketsFunction and design elementsWater deflectorsWindow encapsulations	<ul style="list-style-type: none">通风隔栅垫片功能和设计要素导水器窗密封件			
Material Advantages	材料属性			
<ul style="list-style-type: none">Adhesion to PPHeat stabilityIn-process recycling possibleOptimized compression setOptimized mechanical propertiesSurface mappingWeather resistant	<ul style="list-style-type: none">包胶 PP热稳定性可在制造过程中回收利用出色的压缩永久变形性能优异的机械特性表面映射耐候性			
Regulations / Approvals	法规 / 批准			
<ul style="list-style-type: none">DIN 75201-B – FoggingOutdoor Weathering Arizona 24 month SAE J1976Outdoor Weathering Florida 24 month SAE J1976PV 3929 Kalahari (1 year) – Weathering TestPV 3929 Kalahari (2 years) – Weathering TestPV 3930 Florida (1 year) – Weathering TestPV 3930 Florida (2 years) – Weathering TestUL 94 HBVDA 270 B3 – Odor	<ul style="list-style-type: none">DIN 75201-B - 雾化值室外耐候性测试 亚利桑那 24 个月 SAE J 1976室外耐候性测试 佛罗里达 24 个月 SAE J 1976PV 3929 卡拉哈里试验 (1 年) - 耐候性测试PV 3929 卡拉哈里试验 (2 年) - 耐候性测试PV 3930 佛罗里达试验 (1 年) - 耐候性测试PV 3930 佛罗里达试验 (2 年) - 耐候性测试UL 94 HBVDA 270 B3 - 气味			

Thermolast® K | 热塑宝 K

Series 系列	The VS/AD/HM series is your material solution for applications with velvety surfaces and wear resistance requirements. It convinces by its adhesion properties to polar thermoplastics as well as by its resistance to chemicals, especially sebum skin grease. The compounds are available in black and natural colors. Natural color variants can be colored in many different ways.
VS/AD/HM	VS/AD/HM 系列材料解决方案适用于要求绒面触感和耐磨性应用。它对极性热塑性材料具有包胶性，对化学品（尤其是皮脂润滑油）具有耐受性。这类化合物可选黑色和本色。本色产品系列可用多种不同方式着色。

Processing Method : Injection Molding | 加工方法 : 注塑成型

Compound Name	化合物名称	Hardness 硬度	Color 颜色	Adhesion 包胶
TCxCEN		60 – 80 Shore A	Natural 本色	ABS, ASA, PA, PC, PC/ABS, SAN
TCxCEU		60 – 80 Shore A	Natural 本色	
TCxCEZ		60 – 80 Shore A	Black 黑色	
Typical Applications	典型应用			
<ul style="list-style-type: none">Cell phone coversCosmetic packagingEar phonesFunction and design elementsHandles (hand tools and power tools etc.)Remote controlsSoft touch surface (thumb wheels, push buttons, switches)Wearables	<ul style="list-style-type: none">手机套化妆品包装耳机功能和设计要素手柄（手动工具和电动工具等）遥控器软质表面（拨轮、按键、开关）可穿戴设备			
Material Advantages	材料属性			
<ul style="list-style-type: none">Abrasion resistanceAdhesion to PA6 and PA12Adhesion to PC, ABS, PC/ABS, ASA, SANHalogen content (chlorine + bromine) < 900 ppmOptimized mechanical propertiesResistance to skin oils, sunscreen or olive oilScratch resistanceSoft, velvety feel	<ul style="list-style-type: none">耐磨性包胶 PA6 和 PA12包胶 PC、ABS、PC/ABS、ASA、SAN卤素含量（氯+溴）< 900 ppm优异的机械特性耐皮肤油脂、防晒霜或橄榄油耐刮擦天鹅绒般柔软触感			
Regulations / Approvals	法规 / 批准			
<ul style="list-style-type: none">DIN 75201-B – FoggingDIN EN ISO 105-B06 Method 3UL 94 HBVDA 270 B3 – Odor	<ul style="list-style-type: none">DIN 75201-B - 雾化值DIN EN ISO 105-B06 Method 3UL 94 HBVDA 270 B3 - 气味			

Thermolast® R | 热塑宝 R

Series 系列	The RC/PCR/AP series is your material solution with a post-consumer recycled content of 20 - 48 % (hardness-dependent) for a variety of applications with adhesion to PP or for single component parts for Asia Pacific Market. The compounds are available in black colors.
RC/PCR/AP	RC/PCR/AP 系列含 25%-48%（根据硬度而定）消费后回收物，适合亚太市场工业应用，是您理想的材料解决方案。有黑色可选。

Processing Method : Injection Molding | 加工方法 : 注塑成型

Compound Name	化合物名称	Hardness 硬度	Color 颜色	Adhesion 包胶
RCxOGM-BLCK		50 – 90 Shore A	Black 黑色	PP
Typical Applications	典型应用			
<ul style="list-style-type: none">Cable clipsConnectorsElectric and electronic componentsFunction and design elementsGrip applicationsGrommetHandles (hand tools and power tools etc)	<ul style="list-style-type: none">缆线卡钩连接器电气电子部件功能和设计要素把手应用垫圈手柄（手动工具和电动工具等）			
Material Advantages	材料属性			
<ul style="list-style-type: none">Adhesion to PPAlternative material to EPDM and PVC-PNon-sticky surfaceOptimized mechanical propertiesSustainable materialTempertaure stability up to 80 °CThermoplastic alternative to elastomers	<ul style="list-style-type: none">包胶 PPEPDM 和 PVC-P 的替代材料不粘表面优异的机械特性可持续利用的材料80 °C 下的温度稳定性弹性体的热塑性替代品			

THERMOLAST® V | 热塑宝 V

Series 系列	The LTP series is your material solution for applications with sealing function and temperature resistance requirements. The compounds are characterized by their adhesion to PP. They are available in black and natural colors. Natural color variants can be colored in many different ways.
LTP	LTP 系列材料解决方案适用于要求密封性和耐高温应用。这类化合物具有包胶 PP 的特点。可选黑色和本色。本色产品系列可用多种不同方式着色。

Processing Method : Injection Molding | **加工方法** :注塑成型

Compound Name 化合物名称	Hardness 硬度	Color 颜色	Adhesion 包胶
TVxLVN TVxLVZ	50 – 90 Shore A 50 – 90 Shore A	Natural 本色 Black 黑色	PP
Typical Applications	典型应用		
<ul style="list-style-type: none">FasteningGrommetsMechanical componentsSeals	<ul style="list-style-type: none">紧固件垫圈机械部件密封件		
Material Advantages	材料属性		
<ul style="list-style-type: none">Adhesion to PPHysteresisIn-process recycling possibleLong term sealing functionOptimized compression setOptimized mechanical propertiesResistance to polar coolantsTemperature stability up to 120 °C	<ul style="list-style-type: none">包胶 PP滞后可在制造过程中回收利用长期密封功能出色的压缩永久变形性能优异的机械特性耐极性冷却剂120 °C下的温度稳定性		
Regulations / Approvals	法规 / 批准		
<ul style="list-style-type: none">UL 94 HB	<ul style="list-style-type: none">UL 94 HB		

THERMOLAST® V | 热塑宝 V

Series 系列	The LTP/PA range is your material solution for sealing applications and temperature resistance requirements. The compounds are characterized by their adhesion to PA. The compounds are available in black and natural. Natural color variants can be colored in a variety of ways.
LTP/PA	LTP/PA 系列材料解决方案适用于要求密封性和耐高温应用。这类化合物具有包胶 PA 的特点。该化合物可选黑色和本色。本色产品系列可用多种不同方式着色。

Processing Method : Injection Molding | **加工方法** :注塑成型

Compound Name 化合物名称	Hardness 硬度	Color 颜色	Adhesion 包胶
TVxVAN TVxVAZ	60 – 80 Shore A 50 – 80 Shore A	Natural 本色 Black 黑色	PA
Typical Applications	典型应用		
<ul style="list-style-type: none">FasteningGrommetsMechanical componentsSeals	<ul style="list-style-type: none">紧固件垫圈机械部件密封件		
Material Advantages	材料属性		
<ul style="list-style-type: none">Adhesion to PA6 and PA6.6Adhesion to PA12HysteresisIn-process recycling possibleLong term sealing functionOptimized compression setOptimized mechanical propertiesResistance to polar coolantsTemperature stability up to 120 °C	<ul style="list-style-type: none">包胶 PA6 和 PA6.6包胶 PA12滞后可在制造过程中回收利用长期密封功能出色的压缩永久变形性能优异的机械特性耐极性冷却剂120 °C下的温度稳定性		
Regulations / Approvals	法规 / 批准		
<ul style="list-style-type: none">UL 94 HB	<ul style="list-style-type: none">UL 94 HB		

For Tec E® | 尼塑宝®

Series 系列	The AD/PAX/CR series is your material solution for applications with velvet touch. The material has increased resistance to skin oils, sun cream and olive oil. The compounds are characterized by their adhesion to polyamides, partially aromatic polyamides and polyarylamides. The compounds are available in black and natural colors. Natural color variants can be colored in many different ways.
AD/PAX/CR	AD/PAX/CR 系列材料解决方案适用于有柔软触感要求的应用领域。该系列材料可更好地抵抗皮肤油脂、防晒霜和橄榄油。这类化合物对聚酰胺、部分芳族聚酰胺和聚丙烯酰胺具有包胶性。这类化合物有黑色和本色可选。本色产品系列可用多种不同方式着色。

Processing Method : Injection Molding | **加工方法** :注塑成型

Compound Name 化合物名称	Hardness 硬度	Color 颜色	Adhesion 包胶
OCxOAN OCxOAZ	60 – 80 Shore A 60 – 80 Shore A	Natural 本色 Black 黑色	PA
Typical Applications	典型应用		
<ul style="list-style-type: none">Ear phonesFunction and design elementsSoft touch for grips, switches and matsWearables	<ul style="list-style-type: none">耳机功能和设计要素把手、开关和橡胶垫的柔软触感可穿戴设备		
Material Advantages	材料属性		
<ul style="list-style-type: none">Adhesion to PA6 and PA6.6, up to 50% glass fiberAdhesion to PA12Adhesion to partially aromatic polyamides (PAX) and polyarylamides (PARA)ColorableNon-sticky surfaceResistance to skin oils, sunscreen or olive oil	<ul style="list-style-type: none">包胶 PA6 和 PA6.6，玻璃纤维高达 50%包胶 PA12包胶部分芳族聚酰胺（PAX）和聚丙烯酰胺（PARA）可染色不粘表面耐皮肤油脂、防晒霜或橄榄油		
Regulations / Approvals	法规 / 批准		
<ul style="list-style-type: none">UL 94 HB	<ul style="list-style-type: none">UL 94 HB		



EUROPE, MIDDLE EAST, AFRICA
欧洲、中东、非洲

KRAIBURG TPE GmbH & Co. KG
Friedrich-Schmidt-Str. 2
84478 Waldkraiburg, Germany

☎ +49 8638 9810-0
✉ info@kraiburg-tpe.com

ASIA PACIFIC
亚太

KRAIBURG TPE Technology (M) SDN.BHD.
Lot 1839 Jalan KPB 6
Kawasan Perindustrian Balakong
43300 Seri Kembangan, Selangor, Malaysia

☎ +60 3 9545 6393
✉ info-asia@kraiburg-tpe.com

AMERICAS
美洲

KRAIBURG TPE Corporation
4365 Hamilton Mill Road
Buford, GA 30518, USA

☎ +1 678 584-5020
✉ info-america@kraiburg-tpe.com

For contact details of our branch offices and partners, see www.kraiburg-tpe.cn. Member of the KRAIBURG Holding.

© Copyright 2023 KRAIBURG TPE. Subject to change without prior notice.

KRAIBURG TPE makes no warranties and assumes no liability in connection with any use of this information.

如需查询我们分支机构和合作伙伴的详细联系信息，请访问 www.kraiburg-tpe.cn. Member of the KRAIBURG Holding。

© Copyright 2023 KRAIBURG TPE. 本信息内容如有更改，恕不另行通知。

凯柏胶宝® 对此信息不做任何保证，亦不承担任何责任。